



1x32 Fiber PLC Splitter, ABS Box Type, Singlemode, SC/APC

SKU: PLC-ABS-1X32SCA01M5

TXM offers a variety of Planar lightwave circuit (PLC) splitters, which are ideally used in outdoor fiber distribution boxes or work cabinets for EPON, GPON, FTTH/FTTX applications. The PLC splitter is an optical power management device used to distribute optical signals from the Central Office (CO) to multiple premise locations. They provide complete protection for inner optical components and cable and are designed for convenient and reliable installations.


Structure and Dimensions

Stand Alone structure

2.0mm G.657A1 for Fiber Input/Output

Wide Wavelength range, Excellent channel to channel uniformity

Low insertion loss, Low PDL and High reliability

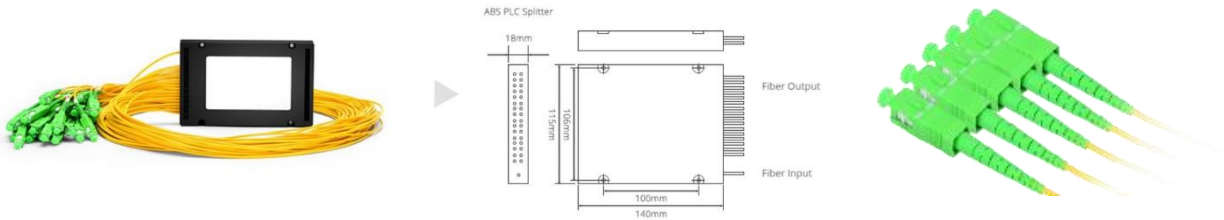

Product Details

Package Style	ABS Module	Configuration Type	1x32
Fiber Type	Singlemode G.657A1	Connector Type	SC/APC
Input/Output Fiber Diameter	2.0mm	Pigtail Length	1.5m
Insertion Loss	≤17.0dB	Return Loss	≥50dB
Loss Uniformity	≤1.6dB	Directivity	≥55dB
Polarization Dependent Loss	≤0.3dB	Temperature Dependent Loss	≤0.8dB
Wavelength Dependent Loss	≤0.5dB	Operating Bandwidth	1260~1650nm
Operating/Storage Temperature	-40~85°C	Dimensions (HxWxD)	0.71"x5.51"x4.53" (18x140x115mm)